

TECHNICAL DATA SHEET

1. TRADE NAME: QUI NO

Product for the removal of pigeons and other disturbing birds from roofs, windowsills, parapets, gutters and eaves, industries, offices, apartments and other buildings.

2. PRODUCT CODE: P-14006

3. PICTURE:



4. TECHNICAL SPECIFICATIONS:

Qui No is a product for the removal of disturbing birds consisting in a gel.

It is composed of:

- Container (silicone tube type) made of PE-HD (high density polyethylene) filled with a mixture of polyisobutylene, CAS 9003-27-4
- Viscosity (cSt): 6-1500000 (at 40 °C)
- Flash point: > 100 °C
- Density: 825 - 920 kg/m³ (at 15 °C)
- Insoluble in water

Tube size: diameter 48 mm x 230 mm (h)

Quantity of glue: 250 g

Colour: As in the picture

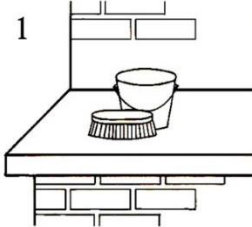
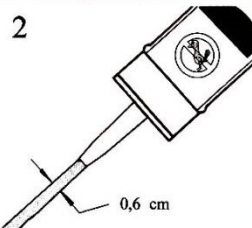
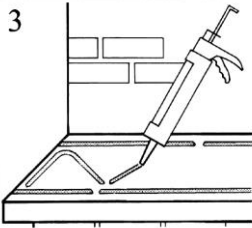

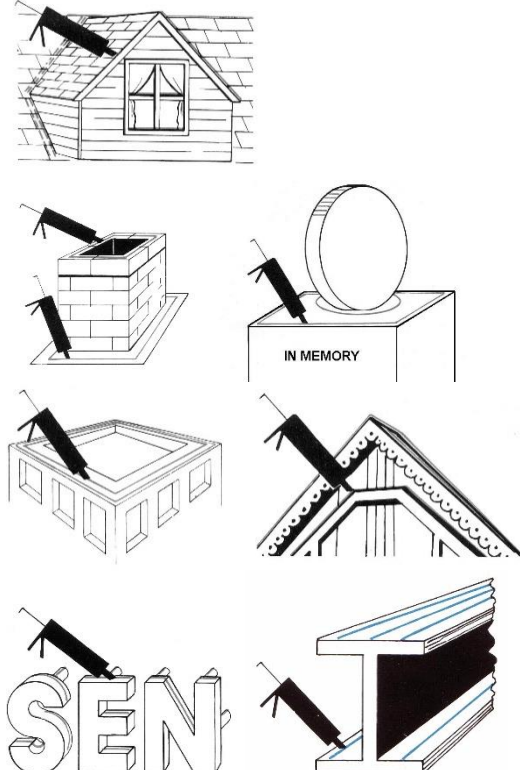
InPEST products could undergo necessary or opportune technical changes, at any given time, without prior written notice to customers.

5. HOW TO USE:

Qui No has to be used according to the instructions below, to deter the pigeons and other pest birds nesting from roofs, ledges, parapets, gutters, monuments, offices, apartments and other buildings. For its application, use a proper caulking gun.

Use Qui No as follows:

TECHNICAL DATA SHEET

<p>1</p> 		<p>CLEAN THE SURFACE Remove excrements, feathers and other nesting materials. Wash with water and detergent. Leave the surface dry.</p>
<p>2</p>  <p>0,6 cm</p>		<p>STRIP WIDTH For the cartridge application, the width depends on the level in which the cut is made on the cap. It is recommended a width of 0,6 cm.</p>
<p>3</p> 		<p>APPLICATION ON A SURFACE Apply a straight strip at 3 cm from the edge, and another one at 10 cm from the first one. For large surfaces, repeat the above steps or use weaving strips, to cover the whole surface. Leave a little space along the strips to allow the rainwater drainage. An only cartridge covers 10 linear meters.</p>
		

TECHNICAL DATA SHEET

At the current state of knowledge, no damage to the treated surfaces is known. If the material to be treated is not known, it is advisable to carry out a test before use by applying the product in a corner of the surface.

Suggested monitoring period: all the yearlong.

Suggested frequency of the controls: weekly.

Storage conditions: in a cool and dry room, temperature below 25°C and R.H. below 55%.
If well stored (intact packaging), the product shelf life is 3 years.

6. PACKAGING AND SPARE PARTS:

- Packs: 1 piece
- Case: 12 pieces (sales unit)
- Pallet: 960 pcs/pallet; 80 cases/pallet; pallet dimension: 80 x 120 x 125 cm (h)

7. DISPOSAL CONSIDERATIONS:

Waste disposal should be in accordance with existing Community, National and local regulations.